


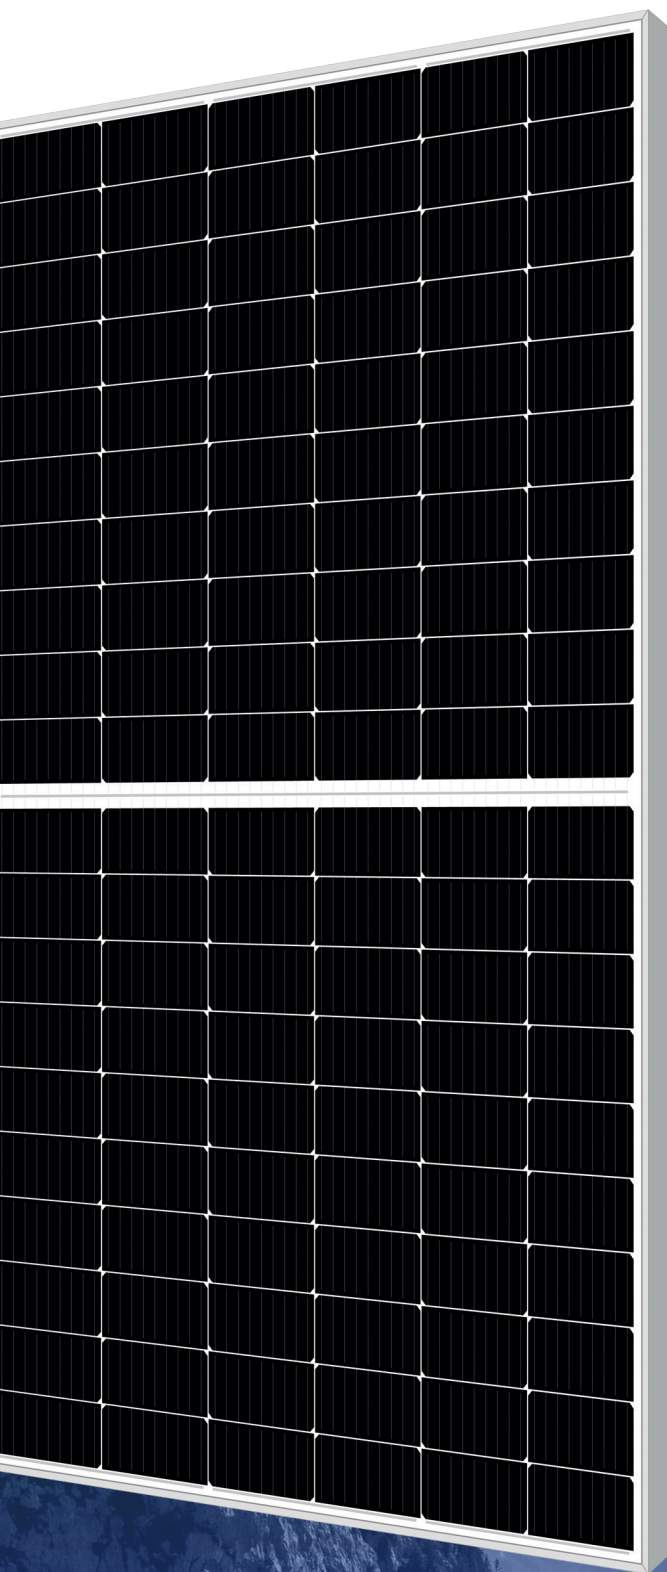

PHOTOVOLTAIC MODULE TMX 380 MH7-120A

360 - 380 Wp

120 MONOCRISTALLIN HALF-CUT CELL TECHNOLOGY

TRIMAX Solar Modules with half-cut cell technology have very high-power output. The half-cut cell technology improves the performance and durability of the module.

OPTIMISED DESIGN

TRIMAX Solar modules with half-cut cells technology and 9 busbars are designed to maximize the module efficiency. The 120 cm extra-long cables allow more installation flexibility. The original MC4 connectors reduce power losses and maximize the power output of your PV project.

FULLY TESTED AND CERTIFIED

The TRIMAX Solar cells are 100% PID-free. The modules are ammonia- and salt spray tested. TRIMAX Solar production facilities are ISO 9001, ISO 14001 and OHSAS 18001 certified.

**15 YEARS
product
guarantee**

**12 YEARS
90%
performance
guarantee**

**25 YEARS
80%
performance
guarantee**

TRIMAX Solar GmbH
Leitzstrasse 45
D-70469 Stuttgart

+49 711 490 66 278
info@trimax-solar.com
www.trimax-solar.com



TMX 380 MH7-120A

ELECTRICAL DATA AT STC

	TMX 360 MH7-120A	TMX 365 MH7-120A	TMX 370 MH7-120A	TMX 375 MH7-120A	TMX 380 MH7-120A
Rated power P _{max} (Wp)	360	365	370	375	380
Rated voltage P _{max} – V _{mp} (V)	33,96	34,14	34,35	34,53	34,80
Rated current P _{max} – I _{mp} (A)	10,60	10,69	10,77	10,86	10,92
Open circuit voltage – V _{oc} (V)	40,62	40,83	41,08	41,28	41,59
Short circuit current – I _{sc} (A)	11,53	11,62	11,70	11,79	11,85
Module efficiency (%)	19,8	20,0	20,3	20,6	20,9
Sorting (plus tolerance)	0 ~ +5 Wp				

STC (Standard Test Conditions) : irradiance 1000 W/m², AM = 1,5, cell temperature 25°C, measurement tolerance P_{max} ± 3%, V_{oc} ± 3%, I_{sc} ± 3%

ELECTRICAL DATA AT NOCT


Power at P _{max} (Wp)	276,56	280,41	284,25	288,09	291,93
Voltage at P _{max} – V _{mp} (V)	30,96	31,12	31,31	31,47	31,72
Current at P _{max} – I _{mp} (A)	8,93	9,01	9,08	9,15	9,20
Open voltage current – V _{oc} (V)	37,50	37,70	37,93	38,11	38,40
Short circuit current – I _{sc} (A)	9,80	9,88	9,95	10,02	10,07

NOCT (normal operating cell temperature) : irradiance 800W/m², Air Mass = 1,5, wind speed 1m/s, ambient temperature 20°C, cell operating temperature 45 ±2°C


LIMITING VALUES

Operating temperature (°C)	-40 ~ +85
Maximum system voltage (V)	1500
Maximum return current (A)	20
Safety class	class II
Maximum load capacity (Pa)	snow 5400 / wind 2400

ELECTRICAL CHARACTERISTICS (370W)

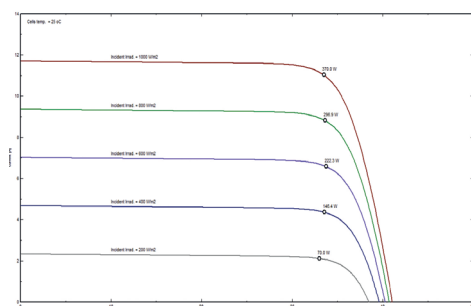

TECHNICAL DRAWING

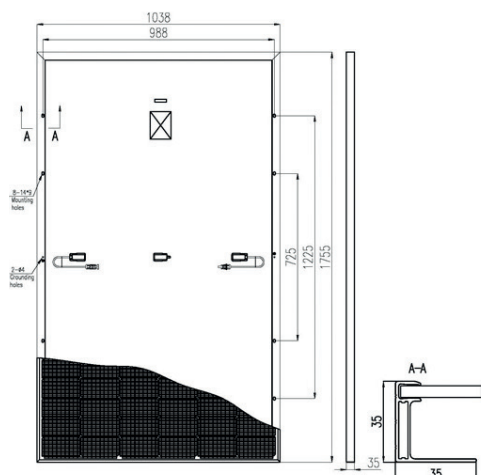

TEMPERATURE COEFFICIENT

Temperature coefficient P _{max}	-0,354 %/°C
Temperature coefficient V _{oc}	-0,266 %/°C
Temperature coefficient I _{sc}	+0,046 %/°C

SPECIFICATIONS

Cells	monocrystalline silicon
Number of cells	120 (6x20)
Dimensions	1755 x 1038 x 35 mm
Weight	18,5 kg
Glass	3,2 mm, high transmission, AR tempered glass
Frame	aluminum, silver or black
Junction-box	IP68, 3 bypass diodes
Cable	solar cable 4,0 mm ² UV-resistant, 1200 mm
Connector	Stäubli MC4
Application class	A

PACKAGING

Container	20' GP	40' HQ
Modules per pallet	48	31
Modules per Container	288	806

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.